


FAR INFRARED SAUNA




Installation Instructions

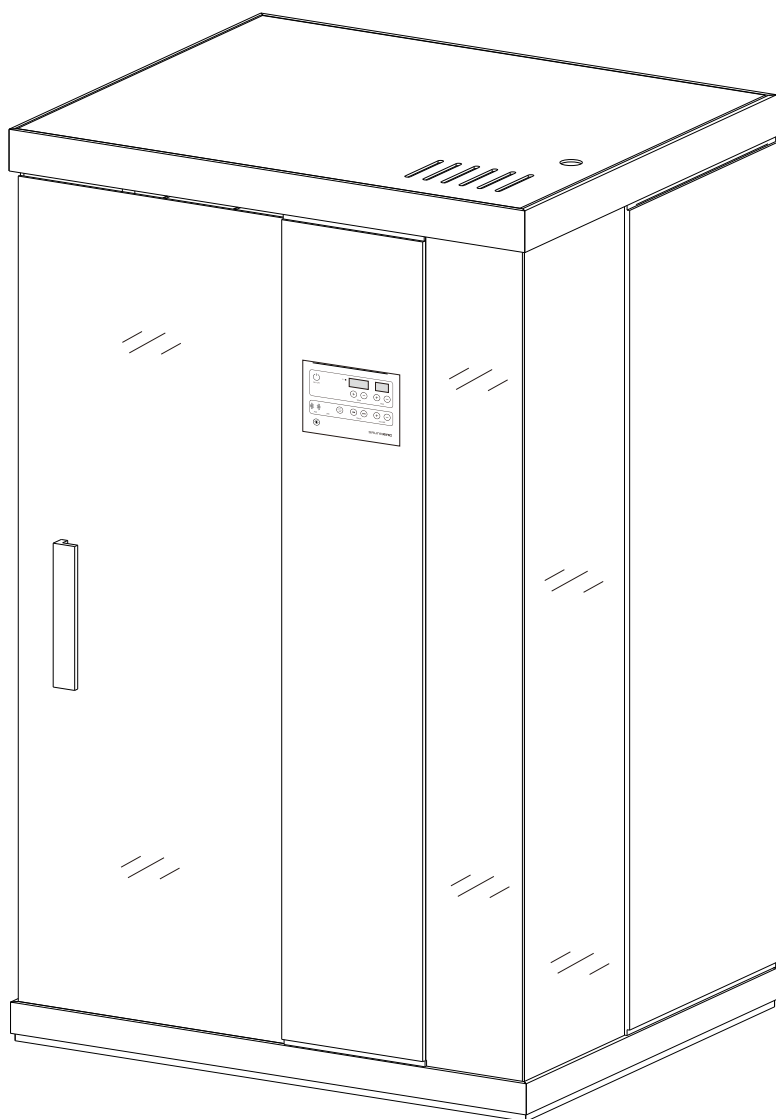

**Please keep this instruction manual in
order to gain access at any time and read
carefully before installing the product**

THANK YOU FOR CHOOSING OUR INFRARED SAUNA!

【Product specification】



Model: FIR-2C8

Dimension: 120x100x190 cm

Voltage: 220-240V

Total Power: 1970 W

Control System : Touch Control Panel

Function : ● Far infrared sauna functionality of

● Audio function

Built - in sensitive radio , radio frequency : 87. 5—108MHZ.


External AUX audio input interface , you can add a variety of player.

Built - in USB drive , can play USB audio.

● Colour lamp function

Colored lamps fixed on the backrest are adjustable in colors of lights.

【Products parts list】

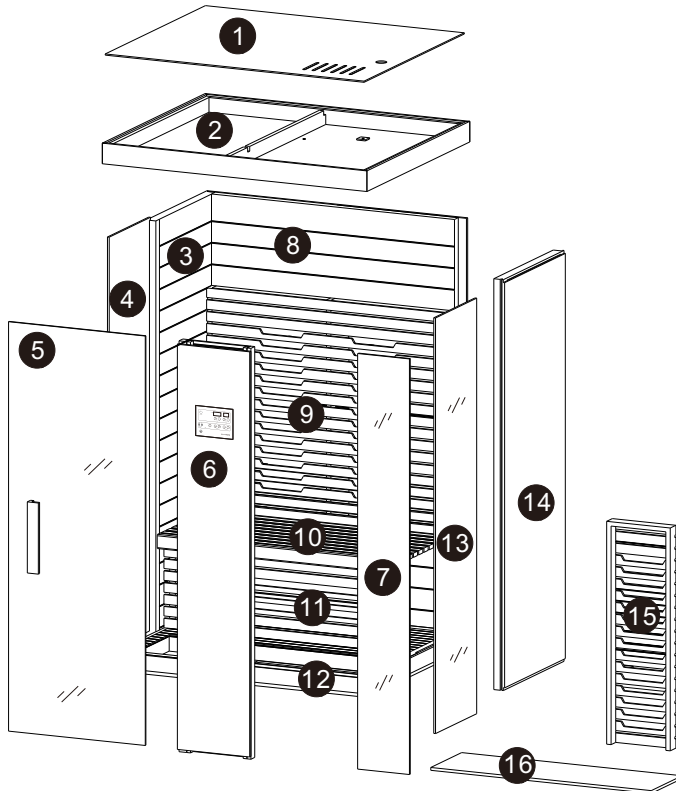


1. Dust shield
2. Roof
3. Left side board
4. Left side glass window
5. Glass door
6. Front board
7. Front board glass
8. Back board
9. Back rest
10. Seat board
11. Seat front shield
12. Bottom board
13. Right side window
14. Right side board
15. Protective box on front board
16. Glass foot heating pad

Before install the product , please check the various components of the product according to the diagram . If it is found that the damage to the product and product components insufficiency , please contact the distributor or dealer promptly.

【Products packing】

Before install the product , please check the number of packages . This product is a 3 box / set

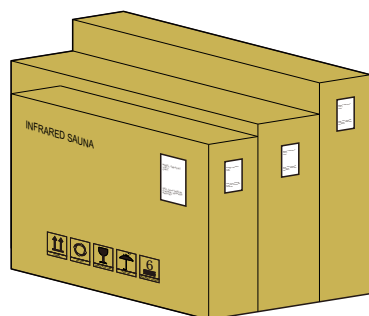

1 of 3 indicates that product box 1


2 of 3 indicates that product box 2

3 of 3 indicates that product box 3

Box sequence Indicates the number of products


If found incomplete packaging box number or product component , please contact your dealer

【Assembly of the product】





1、 The floor is placed in a suitable place and pay attention to the front and rear of the floor, to avoid damage to your floor , after installation , do not move the saunaroom , Therefore recommended:

- a.) Selected should have a power outlet and the length of the power cord Within the scope of saunaroom;
- b.) pay attention to the orientation of the door , to ensure that no items blocking door




2. Back board fixing

When the bottom board are ready, fix the backboard on the bottom board by embedding the dowel of the back board in the groove of the bottom board.




3. Left side board fixing


Embed the dowel of the left side board in the groove of the bottom board, then combine the left side board with the back board, finally, fasten the left side board with screws from the the back board as following figures.



Alignment and combination



Fastening with screws





4. Right side board fixing.


Ditto. Fix the right side board on the bottom board and then combine it with the back board. At last, fasten the right side board with screws from the back board.

5. Seat front shield fixing

Make the grooves of the seat front shield slide along the dowels of the left and right side boards while keeping the seat front shield and the back board in parallel, then connect the power cables of the shield to the cables out of the end of the back board while maintaining a firm connection for the cables against failure to work by the heaters.




At the same time, connect the cable of the glass heating pad to the cable out of the end of the left side board




6. Seat board fixing

Fix the seat board on the fixed wooden blocks and the seat front shield while maintaining stability and fastness.





7. Back rest fixing.


- a) Put the back rest on the seat board and adjust it to position making you feel good.
 - a) Connect the cables of color lamps to the preset connectors out of the back board.
 - b) Fasten the back rest to the back board with screws.
- And among the fixing process, it should be guaranteed that the heaters embedded in the back board are fully covered.



8. Left glass window fixing.


Embed the glass window into the front-end groove of the left side board then down into the groove of the bottom board, And take care of the glass during fixing against any damage to the glass due to a bump or fall.






9. Right side glass window fixing

Ditto. Fix the right side glass window on the right side board and bottom board. And take care of the glass during fixing against any damage to the glass due to a bump or fall.




10. Front board fixing

Fix it in the same way as fixing the back board, embed the dowel of the bottom of the front board in the corresponding groove in the bottom board




11. Front glass window fixing.

Fix it in the same way as fixing the side glass windows, fix the front glass window by embedding an end of the front glass window in the groove at the edge of the front board and then down into the groove of the bottom board. And take care of the glass during fixing against any damage to the glass due to a bump or fall.




12 . Roof fixing


- Set the roof on the top of the cabin from up to down while maintaining fine combinations between the grooves of the roof and the dowels of the four side boards, the grooves and the edges of the glass windows.
- lead the cables out of the four side boards through the corresponding preset holes in the roof and connect them to the corresponding cables with same marks in the roof while maintaining a firm connection for each cable.
- fix the roof on the 4 side boards by screwing via the screw holes in the roof



Connector for electric system



connector for light wave system.



13. Glass door fixing.

- a) Fix the hinge on the front board as figure I
- b) Attach the rubber mats of the hinge to both sides for the glass doors, then fasten the glass door to the hinge while maintaining free opening and closing (figure II)




Figure I







Figure II



14. Protective box fixing for a front board

Cover the front board heater with a protective box and fix the box on the front board with screws.

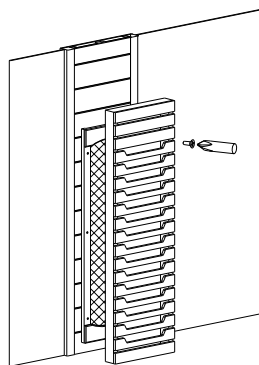

15. Fixing for dust shields and knobs

Set a dust shield on the roof and adjust it to a proper position, then fix it on the roof. Fix the knobs on the glass door with the metal knob out.



16. Cabin fixing is finished

Before using please read the instruction manual , the warning signs of the far infrared sauna room.